



DWC25CO

**DOPPIA PARETE
PARETE ESTERNA COLORATA
DOUBLE WALL
EXTERNAL WALL COLORED**

SISTEMA DOPPIA PARETE DWC25CO COLORATO

Il sistema **doppia parete DWC25CO colorato** è composto da elementi componibili rigidi con finitura lucida in rame naturale, realizzati con parete interna in acciaio inox AISI 316L di spessore minimo 0,4 mm e parete esterna colorata di spessore 0,5 mm, conformi agli standard previsti dalla marcatura CE secondo la normativa EN 1856/1. La coibentazione è realizzata in lana minerale ad alta densità di spessore 25 mm, pressata ed interposta tra le pareti senza elementi di giunzione tra le stesse (ponte termico). Gli elementi modulari hanno innesto classico a bicchiere maschio-femmina calibrato per entrambi le pareti con guarnizione di tenuta a triplice labbro da inserire sulla parete interna, conforme alla normativa europea EN 14241-1, e giunzione meccanica con fascetta di sicurezza.

Riferimento normativo e designazione

Marcatura del prodotto secondo la normativa europea: CE 0476 EN 1856-1.

T200 H1 W V2 L50040* O xx a richiesta
T200 P1 W V2 L50040* O xx con guarnizione
T600 N1 W V2 L50040 O zz / G yy senza guarnizione

* La designazione può variare in funzione della qualità e dello spessore della materia prima come indica la tabella di seguito:

V2 AISI 316L		Vm AISI 304		ISOL.	SPESSORI
EN 1856-1	TUBEST ITALIA	EN 1856/1-2	TUBEST ITALIA		
L50040	DWC25CO	L20040	EDWC25CO	25 mm	0,4 mm
L50050*	DWC25CO	L20050	EDWC25CO	25 mm	0,5 mm
L50060*	DWC25CO	L20060	EDWC25CO	25 mm	0,6 mm

O xx	T200	O zz	T600	G yy
xx = 30 mm ≈ Ø 80 ÷ 300		zz = 50 mm ≈ Ø 80 ÷ 300		yy = 70 mm ≈ Ø 80 ÷ 300
xx = 45 mm ≈ Ø 350 ÷ 450		zz = 75 mm ≈ Ø 350 ÷ 450		yy = 105 mm ≈ Ø 350 ÷ 450
xx = 60 mm ≈ Ø 500		zz = 100 mm ≈ Ø 500		yy = 140 mm ≈ Ø 500

Utilizzo

Condotti, canali da fumo, camini metallici, esalazioni aria asserviti a generatori di calore di tipo atmosferico, pressurizzato, ad aria soffiata, tradizionali o a condensazione, cappe cucina per uso industriale o domestico, stufe a legna, caminetti, stufe a pellet.

Applicazione

Installazione interna o esterna.

Diametri disponibili - mm

80/130 - 100/150 - 130/180 - 150/200 - 180/230 - 200/250 - 250/300 - 300/350.

350/400 A RICHIESTA

Disponibile **fino al diametro interno 800 A RICHIESTA**

DOUBLE WALL DWC25CO SYSTEM COLORED

Double wall DWC25CO colored system is composed by modular rigid elements with surface finish in natural copper, made with the inner wall of stainless steel AISI 316L minimum thickness of 0.4 mm and colored outer wall of 0.5 mm, according to the standards set out by the European CE mark, EN 1856/1. Insulation made of high density mineral wool 25 mm thickness, pressed and interposed between the walls without connecting elements between the same (thermal junction). The modular elements have classic male-female junction calibrated for both sides, with triple seal lip gasket, conforming to European standard EN 14241-1, and mechanical connection with locking clamp.

Normative references and designation

Product marking according to the European standard: CE 0476 EN 1856-1.

T200 H1 W V2 L50040* O xx on request
T200 P1 W V2 L50040* O xx with seal
T600 N1 W V2 L50040 O zz / G yy without seal

* The designation may vary according to the quality and thickness of the raw material, as indicated in the table below:

V2 AISI 316L		Vm AISI 304		INSUL.	THICKNESS
EN 1856-1	TUBEST ITALIA	EN 1856/1-2	TUBEST ITALIA		
L50040	DWC25CO	L20040	EDWC25CO	25 mm	0.4 mm
L50050*	DWC25CO	L20050	EDWC25CO	25 mm	0.5 mm
L50060*	DWC25CO	L20060	EDWC25CO	25 mm	0.6 mm

O xx	T200	O zz	T600	G yy
xx = 30 mm ≈ Ø 80 ÷ 300		zz = 50 mm ≈ Ø 80 ÷ 300		yy = 70 mm ≈ Ø 80 ÷ 300
xx = 45 mm ≈ Ø 350 ÷ 450		zz = 75 mm ≈ Ø 350 ÷ 450		yy = 105 mm ≈ Ø 350 ÷ 450
xx = 60 mm ≈ Ø 500		zz = 100 mm ≈ Ø 500		yy = 140 mm ≈ Ø 500

Utilizations

Ducts, flue pipes, metal chimneys, air conduction subservient to atmospheric heat generators, pressurized, air blown, traditional or condensing, industrial or domestic kitchen hoods, wood stoves, fireplaces, pellet stoves.

Application

Internal or external installation.

Available diameters - mm

80/130 - 100/150 - 130/180 - 150/200 - 180/230 - 200/250 - 250/300 - 300/350.

350/400 ON REQUEST


Available **internal diameter up to 800 ON REQUEST**



DOPPIA PARETE COLORATO - COLORED DOUBLE WALL

DWC25CO


4525CO00100...

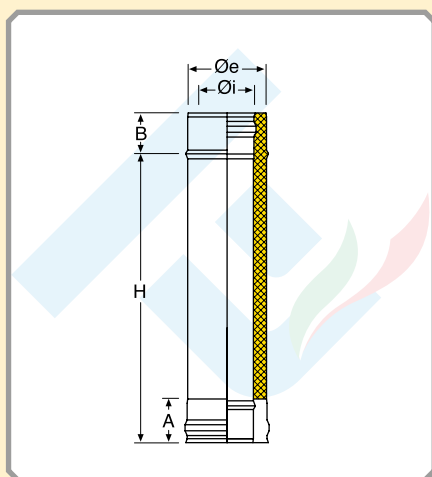

Elemento lineare da 1 m.

Pipe 1 m.


4525CO00050...

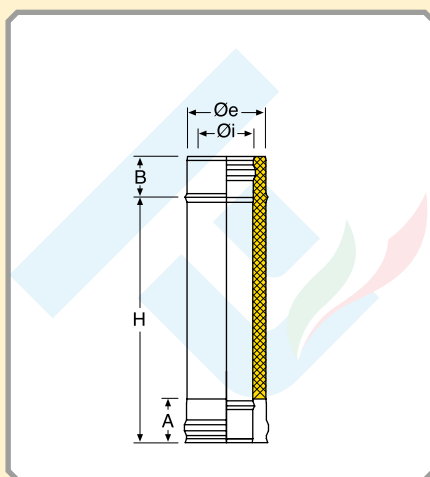

Elemento lineare da 0,50 m.

Pipe 0.50 m.

4525CO00033...

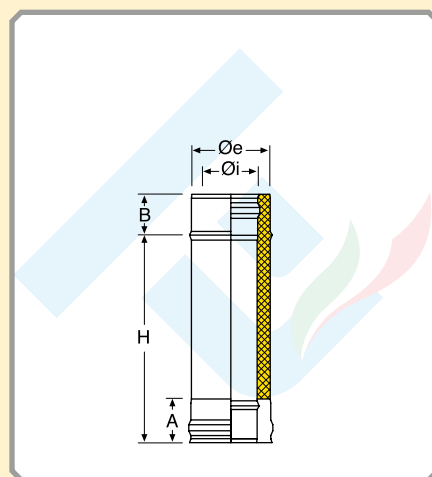

Elemento lineare da 0,33 m.

Pipe 0.33 m.

Øi	Øe	COD.	A	B	H
80	130	4525CO00100080	65	54	940
100	150	4525CO00100100	65	54	940
130	180	4525CO00100130	65	54	940
150	200	4525CO00100150	65	54	940
180	230	4525CO00100180	65	54	940
200	250	4525CO00100200	65	54	940
250	300	4525CO00100250	65	54	940
300	350	4525CO00100300	65	54	940
350	400	4525CO00100350	65	54	940
400	450	4525CO00100400	65	54	940


Øi	Øe	COD.	A	B	H
80	130	4525CO00050080	65	54	440
100	150	4525CO00050100	65	54	440
130	180	4525CO00050130	65	54	440
150	200	4525CO00050150	65	54	440
180	230	4525CO00050180	65	54	440
200	250	4525CO00050200	65	54	440
250	300	4525CO00050250	65	54	440
300	350	4525CO00050300	65	54	440
350	400	4525CO00050350	65	54	440
400	450	4525CO00050400	65	54	440

Øi	Øe	COD.	A	B	H
80	130	4525CO00033080	65	54	270
100	150	4525CO00033100	65	54	270
130	180	4525CO00033130	65	54	270
150	200	4525CO00033150	65	54	270
180	230	4525CO00033180	65	54	270
200	250	4525CO00033200	65	54	270
250	300	4525CO00033250	65	54	270
300	350	4525CO00033300	65	54	270
350	400	4525CO00033350	65	54	270
400	450	4525CO00033400	65	54	270



DWC25C0

4525C000025...




Elemento lineare da 0,25 m.

Pipe 0.25 m.

Øi	Øe	COD.	A	B	H
80	130	4525C000025080	65	54	190
100	150	4525C000025100	65	54	190
130	180	4525C000025130	65	54	190
150	200	4525C000025150	65	54	190
180	230	4525C000025180	65	54	190
200	250	4525C000025200	65	54	190
250	300	4525C000025250	65	54	190
300	350	4525C000025300	65	54	190
350	400	4525C000025350	65	54	190
400	450	4525C000025400	65	54	190

4525C001...

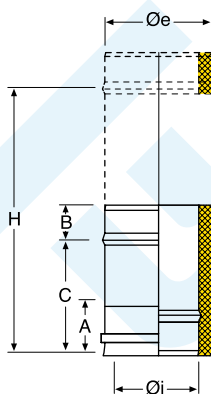


Elemento telescopico.

Adjustable pipe.

Øi	Øe	COD.	A	B	C	H
80	130	4525C001080	65	54	260	390
100	150	4525C001100	65	54	260	390
130	180	4525C001130	65	54	260	390
150	200	4525C001150	65	54	260	390
180	230	4525C001180	65	54	260	390
200	250	4525C001200	65	54	260	390
250	300	4525C001250	65	54	260	390
300	350	4525C001300	65	54	260	390
350	400	4525C001350	65	54	260	390
400	450	4525C001400	65	54	260	390

4525C002090...

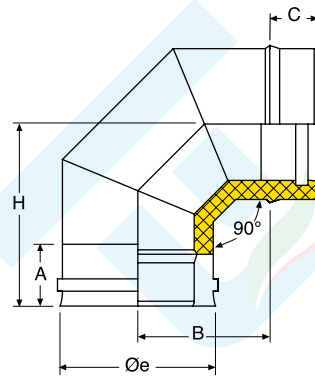

Curva a 90°.

Elbow 90°.

Øi	Øe	COD.	A	B	C	H
80	130	4525C002090080	65	100	54	160
100	150	4525C002090100	65	120	54	180
130	180	4525C002090130	65	130	54	190
150	200	4525C002090150	65	140	54	200
180	230	4525C002090180	65	155	54	215
200	250	4525C002090200	65	165	54	225
250	300	4525C002090250	65	190	54	250
300	350	4525C002090300	65	215	54	275
350	400	#	#	#	#	#
400	450	#	#	#	#	#




DOPPIA PARETE COLORATO - COLORED DOUBLE WALL

DWC25CO

4525CO02045...

4525CO02030...

4525CO02015...

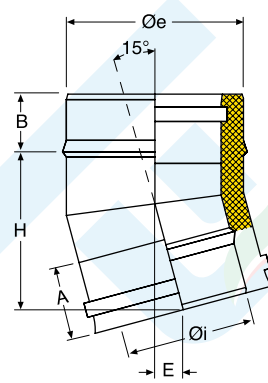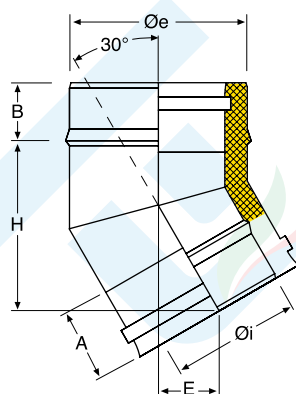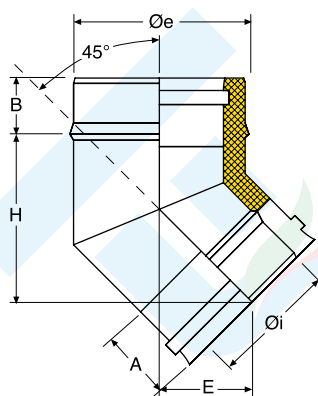

Curva a 45°.

Curva a 30°.

Curva a 15°.

Elbow 45°.

Elbow 30°.

Elbow 15°.

Øi	Øe	COD.	A	B	E	H
80	130	4525CO02045080	65	54	72	119
100	150	4525CO02045100	65	54	75	126
130	180	4525CO02045130	65	54	79	137
150	200	4525CO02045150	65	54	82	143
180	230	4525CO02045180	65	54	88	160
200	250	4525CO02045200	65	54	91	164
250	300	4525CO02045250	65	54	98	184
300	350	4525CO02045300	65	54	105	197
350	400	4525CO02045350	65	54	114	215
400	450	4525CO02045400	65	54	123	234

Øi	Øe	COD.	A	B	E	H
80	130	4525CO02030080	65	54	46	119
100	150	4525CO02030100	65	54	48	122
130	180	4525CO02030130	65	54	51	130
150	200	4525CO02030150	65	54	51	135
180	230	4525CO02030180	65	54	53	142
200	250	4525CO02030200	65	54	54	147
250	300	4525CO02030250	65	54	57	160
300	350	4525CO02030300	65	54	60	172
350	400	4525CO02030350	65	54	63	184
400	450	4525CO02030400	65	54	67	197

Øi	Øe	COD.	A	B	E	H
80	130	4525CO02015080	65	54	23	112
100	150	4525CO02015100	65	54	23	115
130	180	4525CO02015130	65	54	23	119
150	200	4525CO02015150	65	54	24	121
180	230	4525CO02015180	65	54	25	125
200	250	4525CO02015200	65	54	24	128
250	300	4525CO02015250	65	54	25	134
300	350	4525CO02015300	65	54	26	141
350	400	4525CO02015350	65	54	27	147
400	450	4525CO02015400	65	54	28	154



DWC25CO


4525CO04090...



4525CO04135...




4525CO04080...

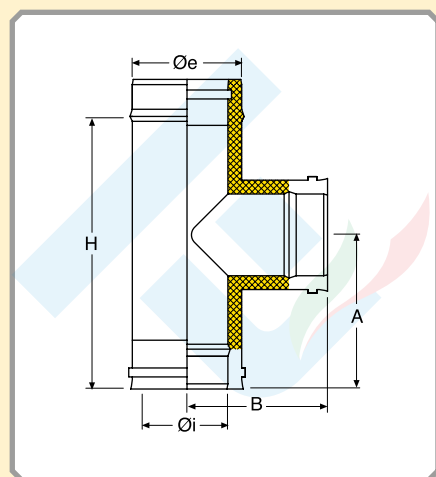


Raccordo a "T" 90°.

90° tee.

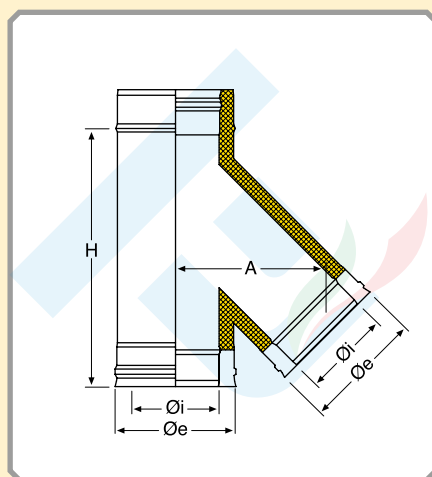

Raccordo a "T" 45°.

45° tee.

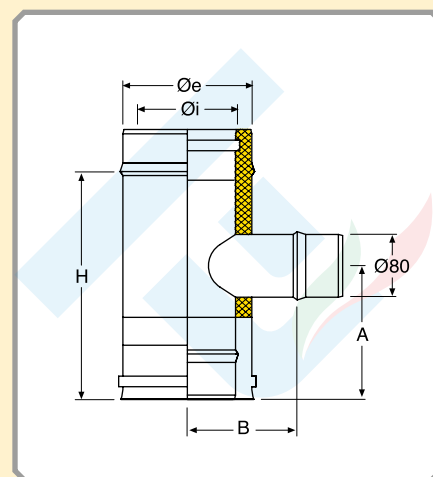

Raccordo a "T" 90° uscita monoparete ridotta a Ø 80 mm.

Tee 90° reduced Ø 80 mm single wall.

Øi	Øe	COD.	A	B	H
80	130	4525CO04090080	162	140	270
100	150	4525CO04090100	162	150	270
130	180	4525CO04090130	242	165	440
150	200	4525CO04090150	242	175	440
180	230	4525CO04090180	242	190	440
200	250	4525CO04090200	242	200	440
250	300	4525CO04090250	242	225	440
300	350	4525CO04090300	267	250	490
350	400	4525CO04090350	322	275	588
400	450	4525CO04090400	380	300	710

Øi	Øe	COD.	A	H
80	130	4525CO04135080	196	350
100	150	4525CO04135100	215	390
130	180	4525CO04135130	241	390
150	200	4525CO04135150	258	440
180	230	4525CO04135180	273	470
200	250	4525CO04135200	300	515
250	300	4525CO04135250	344	560
300	350	4525CO04135300	386	640
350	400	4525CO04135350	496	883
400	450	4525CO04135400	515	940




Øi	Øe	COD.	A	B	H
80	130	4525CO04080080	123	90	190
100	150	4525CO04080100	123	100	190
130	180	4525CO04080130	123	115	190
150	200	4525CO04080150	123	125	190
180	230	4525CO04080180	123	140	190
200	250	4525CO04080200	123	150	190
250	300	4525CO04080250	123	175	190
300	350	4525CO04080300	123	200	190
350	400	4525CO04080350	123	225	190
400	450	4525CO04080400	123	250	190

DOPPIA PARETE COLORATO - COLORED DOUBLE WALL

4525CO10...

4525CO11B...

4525CO11...

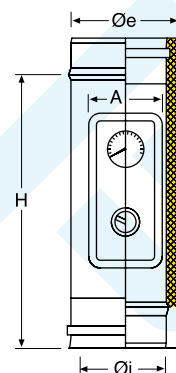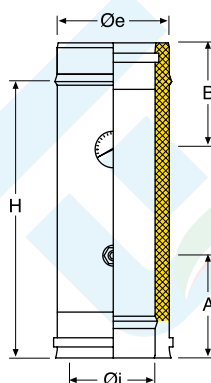

Elemento per prelievo fumi.

Fumes test section with threaded sleeve.

Elemento per prelievo fumi e temperatura.

Element for smoke and temperature.

Elemento per prelievo fumi e temperatura con piastra.

Element with plate for smoke and temperature.

Øi	Øe	COD.	H
80	130	4525CO10080	190
100	150	4525CO10100	190
130	180	4525CO10130	190
150	200	4525CO10150	190
180	230	4525CO10180	190
200	250	4525CO10200	190
250	300	4525CO10250	190
300	350	4525CO10300	190
350	400	4525CO10350	190
400	450	4525CO10400	190


Øi	Øe	COD.	A	B	H
80	130	4525CO11B080	160	160	440
100	150	4525CO11B100	160	160	440
130	180	4525CO11B130	160	160	440
150	200	4525CO11B150	160	160	440
180	230	4525CO11B180	160	160	440
200	250	4525CO11B200	160	160	440
250	300	4525CO11B250	160	160	440
300	350	4525CO11B300	160	160	440
350	400	#	#	#	#
400	450	#	#	#	#

Øi	Øe	COD.	A	B	H
80	130	4525CO11080	113	190	440
100	150	4525CO11100	113	190	440
130	180	4525CO11130	113	190	440
150	200	4525CO11150	113	190	440
180	230	4525CO11180	113	190	440
200	250	4525CO11200	113	190	440
250	300	4525CO11250	185	280	440
300	350	4525CO11300	185	280	440
350	400	4525CO11350	185	280	440
400	450	4525CO11400	185	280	440



DWC25C0

4525C012...

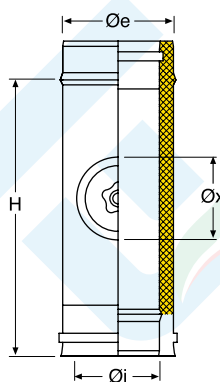


Elemento con portello tondo per ispezione T 200°.

Inspection element with round test point T 200°.

Øi	Øe	COD.	Øx	H
80	130	4525C012080	80	270
100	150	4525C012100	100	270
130	180	4525C012130	130	270
150	200	4525C012150	150	270
180	230	4525C012180	180	440
200	250	4525C012200	200	440
250	300	4525C012250	200	440
300	350	4525C012300	200	440
350	400	4525C012350	200	440
400	450	4525C012400	200	440

4525C013...

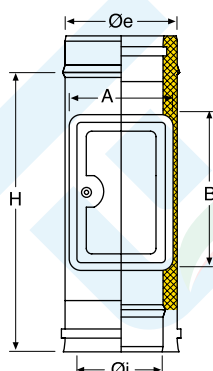


Elemento per raccolta cenere con ispezione rettangolare.

Ash collection element with rectangular door.

Øi	Øe	COD.	A	B	H
80	130	4525C013080	113	190	440
100	150	4525C013100	113	190	440
130	180	4525C013130	113	190	440
150	200	4525C013150	113	190	440
180	230	4525C013180	113	190	440
200	250	4525C013200	113	190	440
250	300	4525C013250	185	280	440
300	350	4525C013300	185	280	440
350	400	4525C013350	185	280	440
400	450	4525C013400	185	280	440

4525C005...

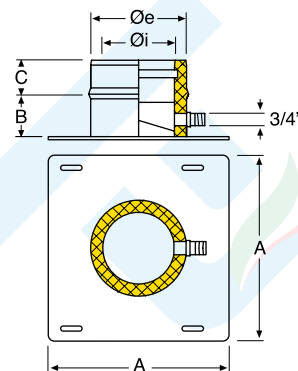

Piastra di partenza con scarico laterale.

Base plate with drain plug.




Øi	Øe	COD.	A	B	C
80	130	4525C005080	230	100	54
100	150	4525C005100	250	100	54
130	180	4525C005130	280	100	54
150	200	4525C005150	300	100	54
180	230	4525C005180	330	100	54
200	250	4525C005200	350	100	54
250	300	4525C005250	400	100	54
300	350	4525C005300	450	100	54
350	400	4525C005350	500	100	54
400	450	4525C005400	550	100	54

DOPPIA PARETE COLORATO - COLORED DOUBLE WALL

4525C008...

4525C007...

4525C006...

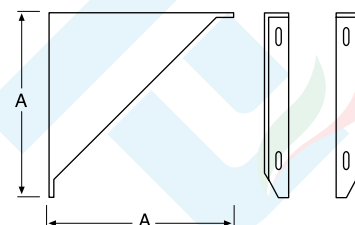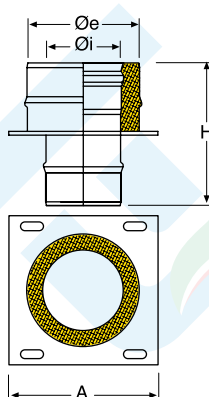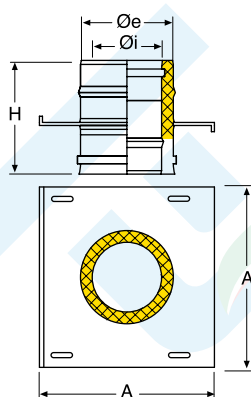

Piastra intermedia.

Piastra intermedia mono - doppia.

Coppia di supporti per piastra.

Intermediate anchor plate.

Intermediate anchor plate single - double.

Cantilever brackets (pair).

Øi	Øe	COD.	A	H
80	130	4525C008080	230	190
100	150	4525C008100	250	190
130	180	4525C008130	280	190
150	200	4525C008150	300	190
180	230	4525C008180	330	190
200	250	4525C008200	350	190
250	300	4525C008250	400	190
300	350	4525C008300	450	190
350	400	4525C008350	500	190
400	450	4525C008400	550	190


Øi	Øe	COD.	A	H
80	130	4525C007080	180	190
100	150	4525C007100	200	190
130	180	4525C007130	230	190
150	200	4525C007150	250	190
180	230	4525C007180	280	190
200	250	4525C007200	300	190
250	300	4525C007250	350	190
300	350	4525C007300	400	190
350	400	#	#	#
400	450	#	#	#

Øi	Øe	COD.	A
80	130	4525C006080	230
100	150	4525C006100	250
130	180	4525C006130	280
150	200	4525C006150	300
180	230	4525C006180	330
200	250	4525C006200	350
250	300	4525C006250	400
300	350	4525C006300	450
350	400	4525C006350	500
400	450	4525C006400	550



DWC25CO


4525CO18...



Scarico condensa.

Tee cap with condense drain.


4525CO16...



Tappo cieco.

Tee cap.

4525CO20...



Cappello cinese.

Rain cap.

Øi	Øe	COD.	A	B	C
80	130	4525CO18080	65	54	12
100	150	4525CO18100	65	54	12
130	180	4525CO18130	65	54	12
150	200	4525CO18150	65	54	12
180	230	4525CO18180	65	54	12
200	250	4525CO18200	65	54	12
250	300	4525CO18250	65	54	12
300	350	4525CO18300	65	54	12
350	400	4525CO18350	65	54	12
400	450	4525CO18400	65	54	12

Øi	Øe	COD.	A	B
80	130	4525CO16080	55	54
100	150	4525CO16100	55	54
130	180	4525CO16130	55	54
150	200	4525CO16150	55	54
180	230	4525CO16180	55	54
200	250	4525CO16200	55	54
250	300	4525CO16250	55	54
300	350	4525CO16300	55	54
350	400	4525CO16350	55	54
400	450	4525CO16400	55	54

Øi	Øe	COD.	A	B	H
80	130	4525CO20080	265	65	200
100	150	4525CO20100	265	65	210
130	180	4525CO20130	320	65	225
150	200	4525CO20150	320	65	235
180	230	4525CO20180	400	65	255
200	250	4525CO20200	400	65	260
250	300	4525CO20250	500	65	285
300	350	4525CO20300	600	65	310
350	400	4525CO20350	720	65	310
400	450	4525CO20400	720	65	310




DOPPIA PARETE COLORATO - COLORED DOUBLE WALL

4525CO21...

4525CO22...

4525CO46...

DWC25CO

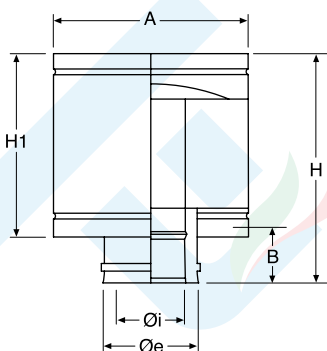

Terminale anti intemperie.

Terminale tronco conico.

Terminale architettonico.

Anti draught terminal.

Venturi cone terminal.

Architectural terminal.

Øi	Øe	COD.	A	B	H	H1
80	130	4525CO21080	220	65	240	165
100	150	4525CO21100	260	65	260	200
130	180	4525CO21130	300	65	280	200
150	200	4525CO21150	310	65	320	250
180	230	4525CO21180	370	65	340	250
200	250	4525CO21200	420	65	340	250
250	300	4525CO21250	470	65	400	310
300	350	4525CO21300	530	65	400	310
350	400	4525CO21350	800	65	420	330
400	450	4525CO21400	900	65	420	330







Øi	Øe	COD.	A	H
80	130	4525CO22080	65	200
100	150	4525CO22100	65	200
130	180	4525CO22130	65	200
150	200	4525CO22150	65	200
180	230	4525CO22180	65	200
200	250	4525CO22200	65	200
250	300	4525CO22250	65	200
300	350	4525CO22300	65	200
350	400	4525CO22350	65	290
400	450	4525CO22400	65	290

Øi	Øe	COD.	A	H
80	130	4525CO46080	65	200
100	150	4525CO46100	65	200
130	180	4525CO46130	65	200
150	200	4525CO46150	65	400
180	230	4525CO46180	65	400
200	250	4525CO46200	65	400
250	300	4525CO46250	65	400
300	350	4525CO46300	65	400
350	400	#	#	#
400	450	#	#	#

4525C024I...

4525C025I...

4525C025A...

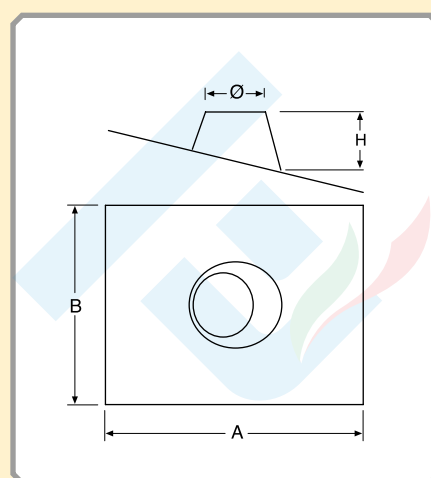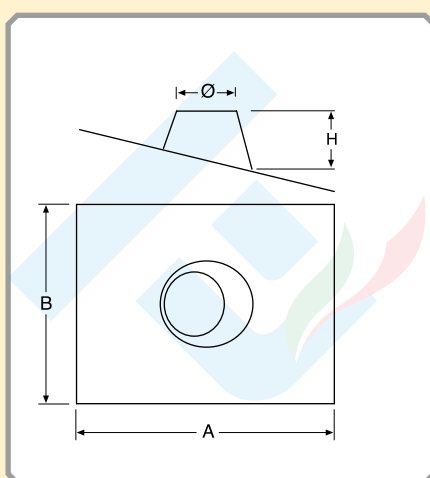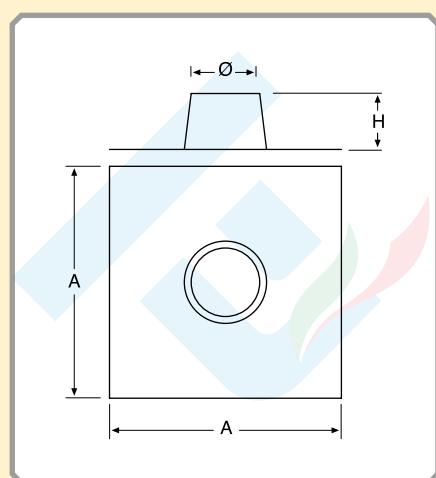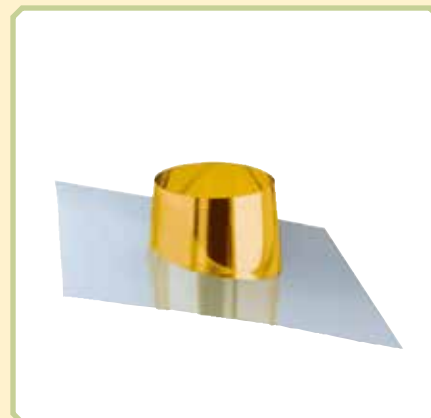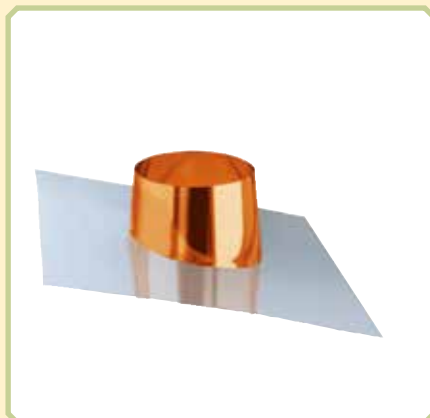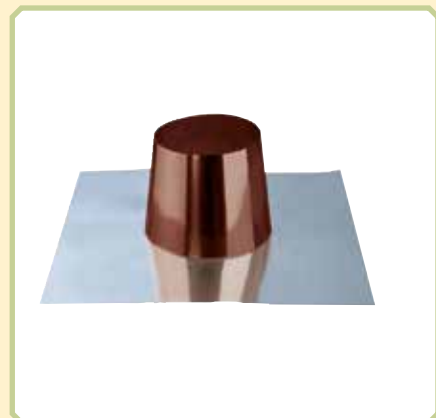

Faldale piano base inox.

Flat stainless steel flashing.

Faldale regolabile da 5° a 30° con base in piombo.

Adjustable flashing from 5° to 30° with lead base.

Faldale regolabile da 5° a 30° con base in alluminio.

Adjustable flashing from 5° to 30° with aluminum base.


Øi	Øe	COD.	A	H
80	130	4525C024I080	400	150
100	150	4525C024I100	500	150
130	180	4525C024I130	500	170
150	200	4525C024I150	600	180
180	230	4525C024I180	600	210
200	250	4525C024I200	600	210
250	300	4525C024I250	600	230
300	350	4525C024I300	680	230
350	400	4525C024I350	700	200
400	450	4525C024I400	850	200

Øi	Øe	COD.	A	B	H
80	130	4525C025I080	600	600	150
100	150	4525C025I100	600	800	150
130	180	4525C025I130	800	800	170
150	200	4525C025I150	800	800	180
180	230	4525C025I180	800	800	210
200	250	4525C025I200	800	800	210
250	300	4525C025I250	800	800	230
300	350	4525C025I300	1000	800	230
350	400	#	#	#	#
400	450	#	#	#	#

Øi	Øe	COD.	A	B	H
80	130	4525C025A080	850	550	150
100	150	4525C025A100	850	550	150
130	180	4525C025A130	1000	650	170
150	200	4525C025A150	1000	650	180
180	230	4525C025A180	1000	650	210
200	250	4525C025A200	1000	650	210
250	300	4525C025A250	1000	750	230
300	350	#	#	#	#
350	400	#	#	#	#
400	450	#	#	#	#

DOPPIA PARETE COLORATO - COLORED DOUBLE WALL

4525C023B...

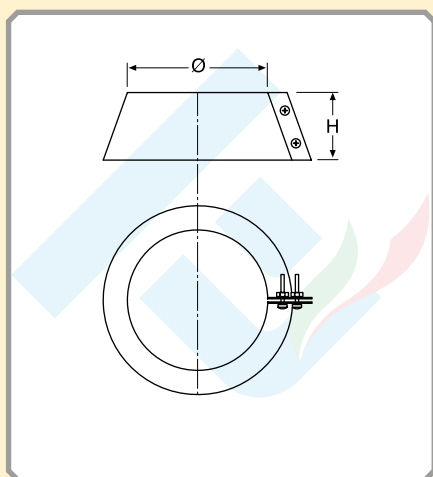


Fascetta anti intemperie.

Storm collar.

Øi	Øe	COD.	H
80	130	4525C023B080	100
100	150	4525C023B100	100
130	180	4525C023B130	100
150	200	4525C023B150	100
180	230	4525C023B180	100
200	250	4525C023B200	100
250	300	4525C023B250	100
300	350	4525C023B300	100
350	400	4525C023B350	100
400	450	4525C023B400	100

4525C028...

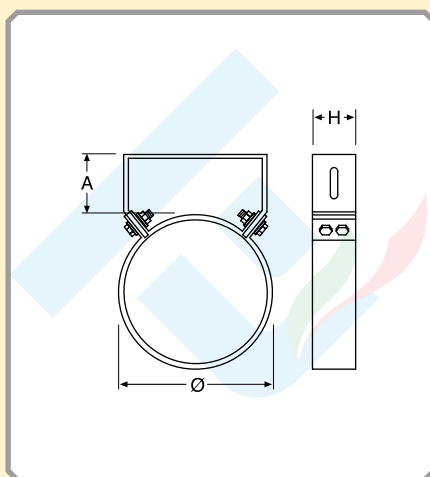


Collare a muro.

Wall bracket.

Øi	Øe	COD.	A	H
80	130	4525C028080	50	40
100	150	4525C028100	50	40
130	180	4525C028130	50	40
150	200	4525C028150	50	40
180	230	4525C028180	50	40
200	250	4525C028200	50	40
250	300	4525C028250	50	40
300	350	4525C028300	50	40
350	400	4525C028350	50	100
400	450	4525C028400	50	100

4525C014...

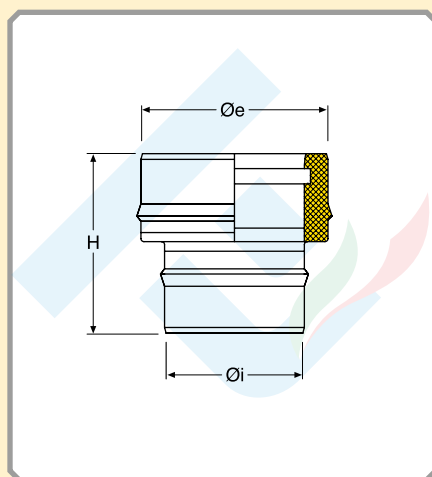

Raccordo ingresso mono - doppia (raccordo per caldaia).

Adaptor from single to double wall (boiler adaptor).




Øi	Øe	COD.	H
80	130	4525C014080	160
100	150	4525C014100	160
130	180	4525C014130	160
150	200	4525C014150	160
180	230	4525C014180	160
200	250	4525C014200	160
250	300	4525C014250	160
300	350	4525C014300	160
350	400	4525C014350	160
400	450	4525C014400	160

DWC25CO

4525C015...

4525C028I...

4525C027...



Raccordo uscita doppia - mono.

Distanziale per collare a muro.

Fascetta di sicurezza.

Adaptor from double to single wall.

Extension for wall bracket single wall.

Locking band.

Øi	Øe	COD.	A	B	H
80	130	4525C015080	65	65	160
100	150	4525C015100	65	65	160
130	180	4525C015130	65	65	160
150	200	4525C015150	65	65	160
180	230	4525C015180	65	65	160
200	250	4525C015200	65	65	160
250	300	4525C015250	65	65	160
300	350	4525C015300	65	65	160
350	400	4525C015350	65	65	160
400	450	4525C015400	65	65	160

Øi	Øe	COD.	H
80	130	4525C028I080	40
100	150	4525C028I100	40
130	180	4525C028I130	40
150	200	4525C028I150	40
180	230	4525C028I180	40
200	250	4525C028I200	40
250	300	4525C028I250	40
300	350	4525C028I300	40
350	400	#	#
400	450	#	#




Øi	Øe	COD.	H
80	130	4525C027080	30
100	150	4525C027100	30
130	180	4525C027130	30
150	200	4525C027150	30
180	230	4525C027180	30
200	250	4525C027200	30
250	300	4525C027250	30
300	350	4525C027300	30
350	400	4525C027350	30
400	450	4525C027400	30

DOPPIA PARETE COLORATO - COLORED DOUBLE WALL

4525CO29...

360531N...

4525CO86...

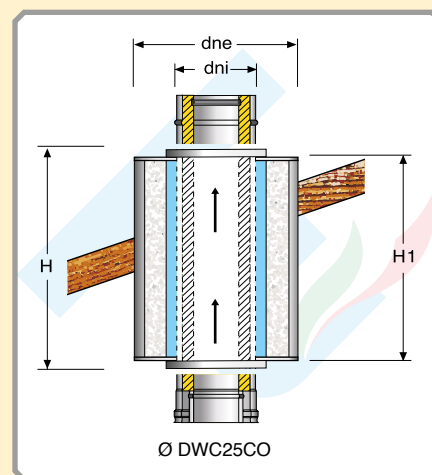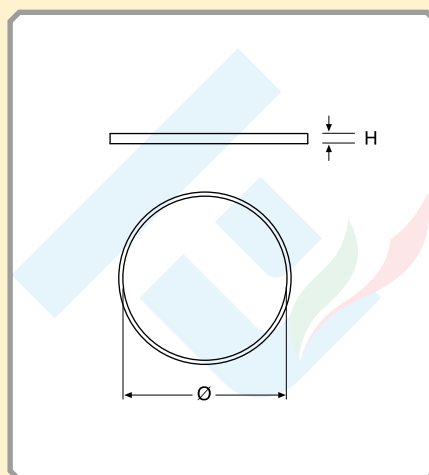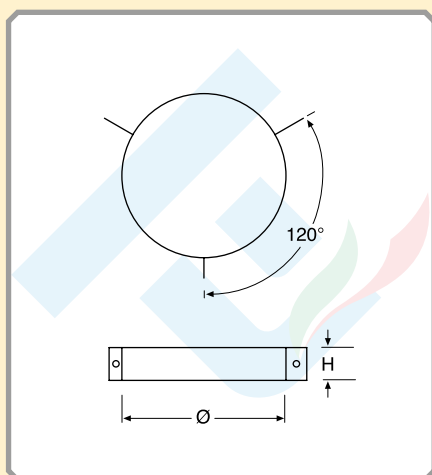

Collare per cavi tiranti.

Guarnizione di tenuta in silicone nero.

Accessorio passaggio a tetto per canna fumaria passante in DW25CO - h 650 mm.
Roof passing-through element for DW25CO - h 650 mm.

Guy wire bracket.

Silicon black seal.

Øi	Øe	COD.	H
80	130	4525CO29080	40
100	150	4525CO29100	40
130	180	4525CO29130	40
150	200	4525CO29150	40
180	230	4525CO29180	40
200	250	4525CO29200	40
250	300	4525CO29250	40
300	350	4525CO29300	40
350	400	#	#
400	450	#	#

Øi	Øe	COD.	H
80	130	360531N080	10
100	150	360531N100	10
130	180	360531N130	10
150	200	360531N150	10
180	230	360531N180	10
200	250	360531N200	10
250	300	360531N250	10
300	350	360531N300	10
350	400	#	#
400	450	#	#

Ø DW25CO	COD.	dni	dne	H	H1
80 130	4525CO86080	150	300	650	600
100 150	4525CO86100	170	300	650	600
130 180	4525CO86130	200	350	650	600
150 200	4525CO86150	220	350	650	600
180 230	4525CO86180	250	400	650	600
200 250	4525CO86200	270	400	650	600
250 300	4525CO86250	320	450	650	600
300 350	4525CO86300	370	500	650	600
350 400	#	#	#	#	#
400 450	#	#	#	#	#

